HARISON
Photo Products

DigiLux 455-DM Fluorescent Lights
DigiLux 455 Fluorescent Lights

Dimensions

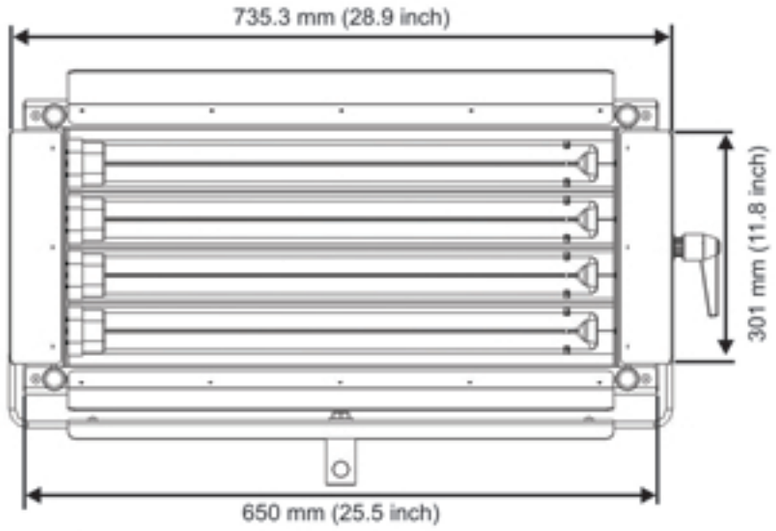

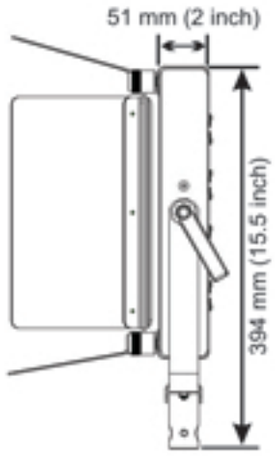

Weight of DigiLux 455 (with Lamp & reflective barndoors) : 6 Kg (13.2 lbs.)
Weight of DigiLux 455 - DM (with Lamp & reflective barndoors) : 6.1 Kg (13.4 lbs.)

Photometric Readings

Lamp used-55w/5500K PL-L

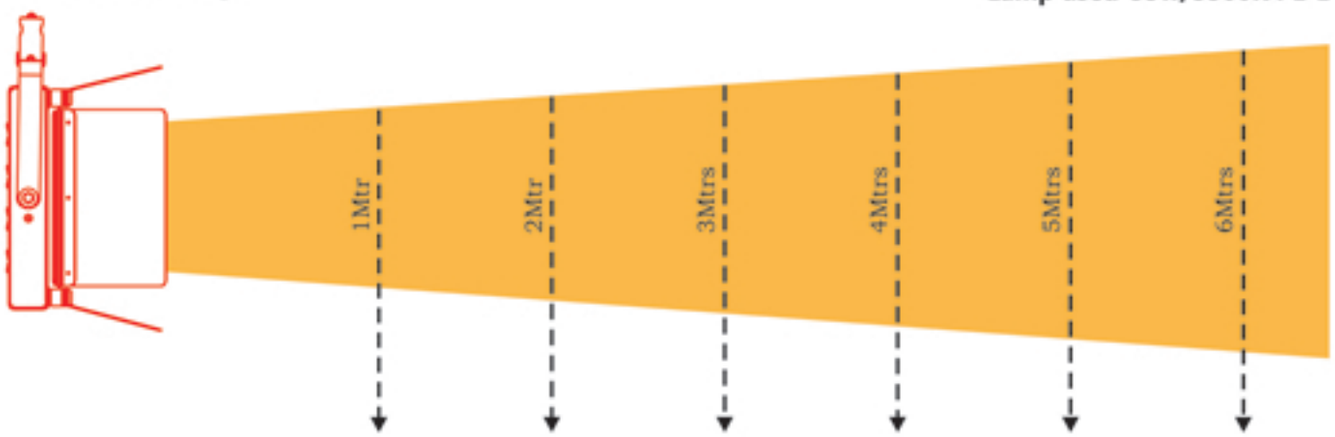

Distance		1Mtr (3.28ft)		2Mtrs (6.56ft)		3Mtrs (9.84ft)		4Mtrs (13.12ft)		5Mtrs(16.40ft)		6Mtrs (19.58ft)	
Light Model	Accessories Used	Lux	FC	Lux	FC	Lux	FC	Lux	FC	Lux	FC	Lux	FC
DigiLux 455 -DM & DigiLux 455	Without Accessories	4600	425	1160	107	530	49	310	28	200	18	150	13
	With Reflective Barndoors	6190	573	1430	132	650	60	360	33	230	21	170	15

Note 1FC = 10.8 lux

SPECIFICATION

General : Can accommodate four linear fluorescent lamp to provide soft, even, flicker free, color corrected light for video & still photography applications
Housing : Made of 1.5 mm thick aluminum sheet metal with textured black powder-coated finish.
Reflector : Made of specialized anodized sheet with polished specular finish
Ballast : Electronic high frequency (full load 40khz) dimmable ballast, Input 230V 50/60Hz,F>0.97, Class A sound rating
Lamp Type : 55W CFL 2G11 base 4-pin,Color temperature 3200K/5400K/5600K
Lamp Socket : 2G11 Base 4-Pin molded white high-strength thermoplastic with push-wire connectors
Mounting : Yoke made of extruded aluminum with 28mm dia. spud (17 mm internal dia.)
Power Supply : Power supply connection 230V/50Hz
On/Off Switch
10A IEC Input plug with fuse holder
4 mt long flexible cable
Dimming : Local control : 0-100% using potentiometer
Analog control 0-10V DC signal through BNC
Safety and Reliability : All metal parts are protected against corrosion.

HARI SINGH & SONS (An ISO 9001 : 2000 Company) G.T. Road, Near Canal, P.O. Sultanwind, Amritsar - 143 021, INDIA.
Phone: + 91-183-2586114 ,2589619 ,+91-8427952565 e-mail : info@harisonsphoto.com URL : www.harisonphoto.com