


DIMENSIONS:

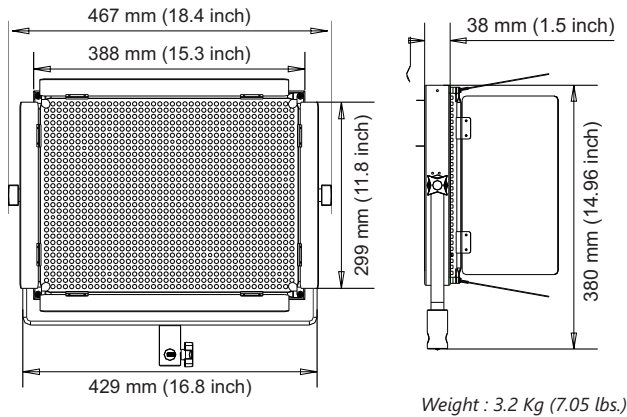

POWER OPTIONS:

① Power Pak 14-Li




- The ARGOS lights can also run with the HARISON Power-Pak 14-Li.



② AC-DC Adapter




- The ARGOS lights can also connect with the power adapter.

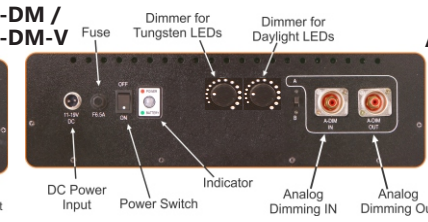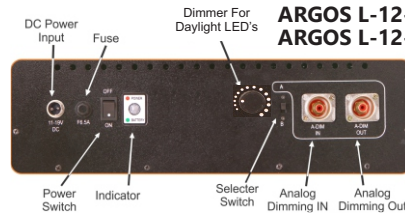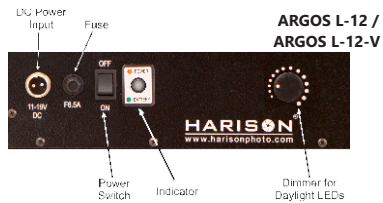

Suffix 'DM' denotes that the light unit has an external port for 0-10V analog dimming.

PHOTOMETRIC READINGS

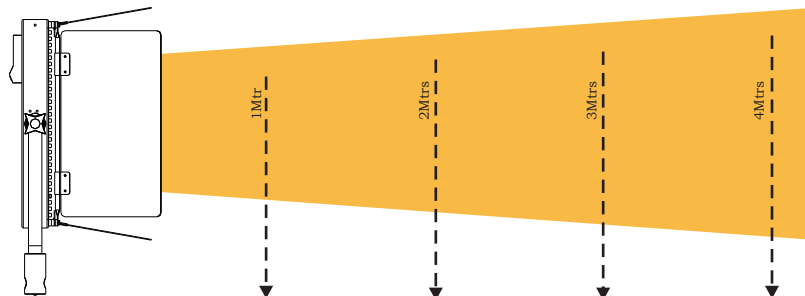

		Distance			
Light Model	LED Type	1 Mtr. (3.28 ft)	2 Mtrs. (6.56 ft)	3 Mtrs. (9.84 ft)	4 Mtrs. (13.12 ft)
Argos L-12	Daylight LED	8300	2610	1560	1000
	Tungsten LED	5300	1920	1230	950
Argos L-12 DC	Daylight LED	8190	2590	1510	990
	Tungsten LED	5190	1890	1210	940

Note 1FC = 10.8 lux

FEATURES


- High CRI (> 90) LEDs.
- Colour-corrected Light Output.
- Power Supply option :
 - AC - DC Adapter
 - V-Mount battery (14.8 Volt)
 - 11 to 19 Volt DC Source
 - compatible with the HARISON Power-Pak 14-Li.
- All-metal body.
- Stepless dimming (Models with remote dimming also available).
- 1 Year Warranty.

	No. of LED's	
	DAYLIGHT	TUNGSTEN
Argos L-12 / Argos L-12-V	1200	1200
Argos L-12 DC / Argos L-12-DC-V	600	600

SPECIFICATIONS

Power Consumption	78 Watts
Operating Voltage:	11 to 19 Volt DC
Weight:	3.2 Kg
Nominal Dimension (cm):	46.7 x 38 x 3.8
Light Source	TrueColor LED
LED Count:	1200
Light Beam Angle:	60°
Illuminance: (at 1 meter)	8100 lx
Power Variation:	Stepless 0-100%
Color Rendering Index (Ra):	>90

③ 12V Battery



④ V-Mount Battery

- Slide in the V-Mount battery :

